(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 13 January 2005 (13.01.2005)

PCT

(10) International Publication Number WO 2005/002972 A1

(51) International Patent Classification7:

B65B 13/22

(21) International Application Number:

PCT/EP2004/006177

(22) International Filing Date:

8 June 2004 (08.06.2004)

(25) Filing Language:

(26) Publication Language:

English

(30) Priority Data:

MI2003A 001261


20 June 2003 (20.06.2003)

- (71) Applicant (for all designated States except US): MESSERSI' PACKAGING S.R.L. [IT/IT]; Via 1° Maggio 3, I-60010 Barbara (AN) (IT).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): UBERTINI, Massimiliano [IT/IT]; Via Aldo Moro 29, I-60030 Serra de' Conti (AN) (IT).

- (74) Agent: FARAGGIANA, Vittorio; Guzzi e Ravizza S.r.l., Via Vincenzo Monti 8, I-20123 Milano (IT).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: STRAPPING MACHINE WITH STRAP FEEDOMG AMD TIGHTENING UNIT

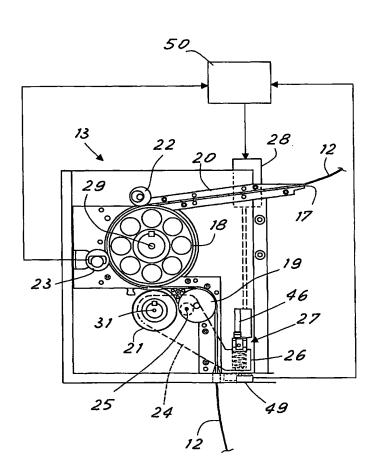

(57) Abstract: A strapping machine comprises a strap extension, retrieval and pulling unit (13) comprising in turn a Powered main wheel (18) around which the strap (12) winds partially to be moved in both directions. The unit comprises two selectable mechanisms for transmission of movement to the main wheel. mechanism causes rotation of the main wheel (18) at a first speed and an auxiliary traction wheel (21) which is pressed against the main wheel with interposition of the strap near the strap input zone on the main wheel to effect pulling of the strap. The second mechanism causes rotation in both directions of the main wheel (18) at a second speed greater than the first to effect extension and retrieval of the strap while the auxiliary traction wheel (21) is at some distance from the main wheel. A control device (50) operates alternatively the first or second mechanism to realize in rapid succession extension, retrieval and pulling of the strap.

WO 2005/002972 A1



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

with international search report